




Quality and reliability is our tradition

KYORITSU

3P BREAKER ADAPTER KEW 8331

Safe and secure connection with 3P breaker by single action!

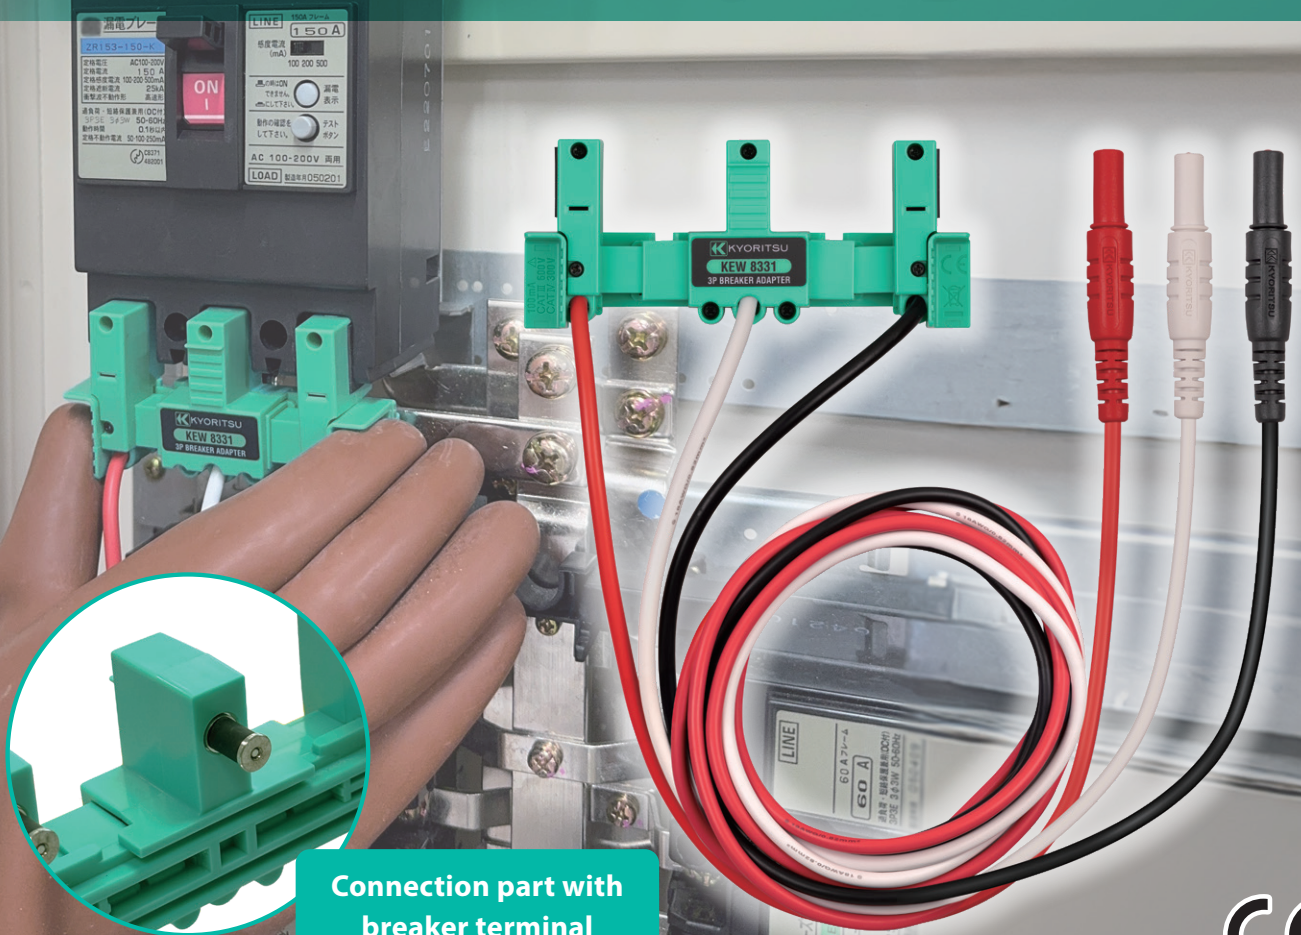

Connection part with
breaker terminal



- Helpful to prevent accidental detachment or short-circuit when connecting alligator clip to breaker.
- Ideal for long period of measurement such as power measurements by trustful connection.
- $\phi 4$ Banana plug enables connection with versatile measuring instruments.

Detailed explanation
of the product is available
on our website.



KYORITSU ELECTRICAL INSTRUMENTS WORKS, LTD.

www.kew-ltd.co.jp


● KEW 8331 Specification

Supported size of breaker*1	30 to 250 AF
Operating voltage range	0 to 600 Vrms AC [50/60 Hz]
Rated current	100 mA
Operating temperature and humidity range	-10 to 50 °C, relative humidity 85% or less (no condensation)
Storage temperature and humidity range	-20 to 60 °C, relative humidity 85% or less (no condensation)
Cable length	1.5 m
Applicable standards	IEC 61010-031 CAT IV 300 V / CAT III 600 V
Dimension	50(L)×117.5(W)×37(D) mm(excluding the cable part)
Weight	Approx. 230 g
Accessories	8077 (Tip attachment) Instruction manual
Optional accessories	7315-BLK(Bananaφ4 female-female connector) 9096(Carrying case)

*1 Attachable dimension ranges are as follows.

- A Distance between the left and right screw heads of the breaker: 47 to 70 mm
- B Width of the breaker terminal: 12.8 to 26.5 mm
- C Depth from the top face of the wall breaker to the screw head: 5 mm (minimum)


There may be some breakers to which this product cannot be installed depending on its type.

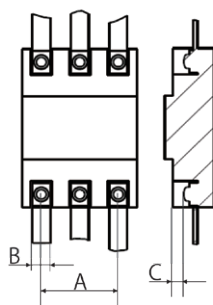

● Accessory



Length extendable!
Turning 8077 attachment upside down extends the length by 8 mm.

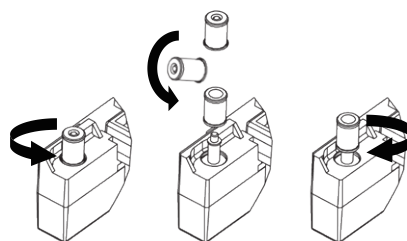

● Optional accessories

Connectable with measuring instruments with male connectors with use of 7315-BLK.




7315-BLK
Bananaφ4 female-female connector



9096
Carrying case


Safe and secure connection with one hand

- Compatible with various sizes of breakers.
- Not easily come off through out the long term use.

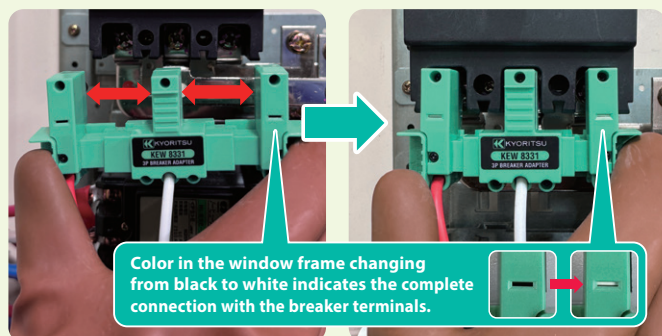

Equipped with highly versatile φ4 banana plug

- Compatible with various measuring instruments: multimeters, loggers, and power meters.

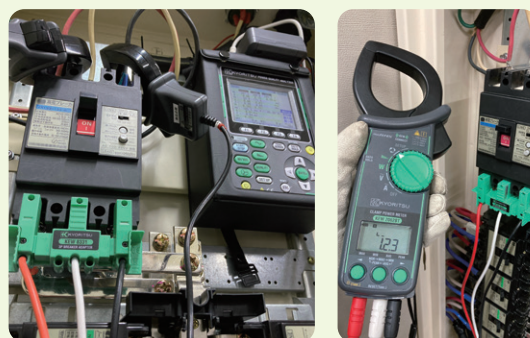

Safety Warnings :

Please read the "Safety Warnings" in the instruction manual supplied with the instrument thoroughly and completely for correct use. Failure to follow the safety rules can cause fire, trouble, electrical shock, etc. Therefore, make sure to operate the instrument on a correct power supply and voltage rating marked on each instrument.

■ For inquiries or orders :



**KYORITSU ELECTRICAL
INSTRUMENTS
WORKS, LTD.**

2-5-20, Nakane, Meguro-ku, Tokyo, 152-0031 Japan

Phone:+81-3-3723-0131

Fax:+81-3-3723-0152

www.kew-ltd.co.jp

