

DMM Application Installation Manual

This manual contains instructions how to install the special software "DMM Application" for MODEL 8241.


1. Introduction

- Interface
This instrument is equipped with a USB interface.
Specifications of USB: Ver.1.1 (Reference)
Following can be done by USB communication.
 - Downloading files in the internal memory of the instrument to a PC.
 - Real-time data reception
- Software
DMM Application
- System Requirements
 - OS (Operation System)
Please check on our website.
 - MEMORY
64Mbyte or more
 - Display
1024×768 dots, 65536 colors or more
 - HDD (Hard-disk space required)
10 Mbyte or more
- Communication Commands
For details on commands, refer to the instruction manual for MODEL 8241.
- Trademark
 - Windows® is a registered trademark of Microsoft in the United States.


The latest software is available for download from our website.
www.kew-ltd.co.jp



- (5) Check the box for "Include subfolders", and then click "Browse".

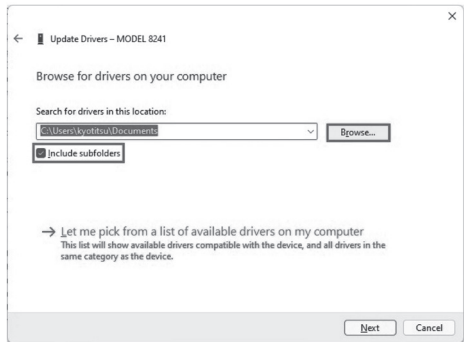


- (6) Select the "DRIVER" folder in the "MODEL8241 USBDriver" downloaded at step (1) and click "OK".

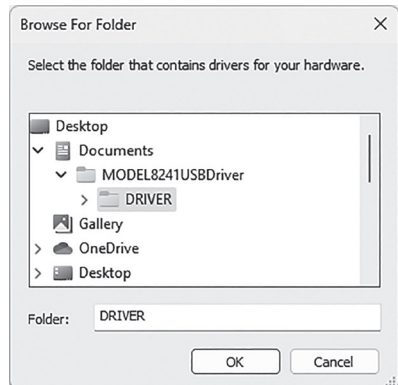


2. DMM application installation

- (1) The followings should be checked before installing this application.
- To prepare your system for installation, please close all open programs.
 - Be sure NOT to connect DMMs until the installation completes.
 - Installation shall be done with Administrator right.
- (2) Please access our website (www.kew-ltd.co.jp/en/) and go to "Download" and then "Software" and download "DMM Application" according to the instructions described on the page.
- (3) When download completes, click "setup_ENG.exe" and click "Next".
- (4) Read through and understand the License Agreement and click "I accept....", and then click **Next**.

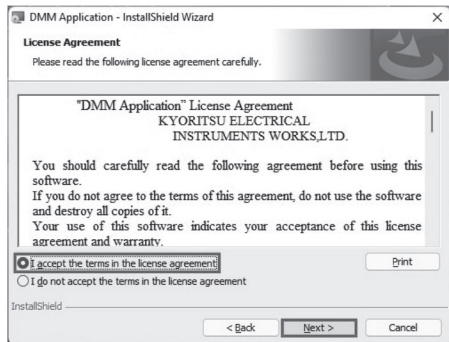


- (5) Confirm the information on installation, and then click **Install** to start installation.

- (6) Click **Finish** when "InstallShield Wizard Complete" dialog box appears.

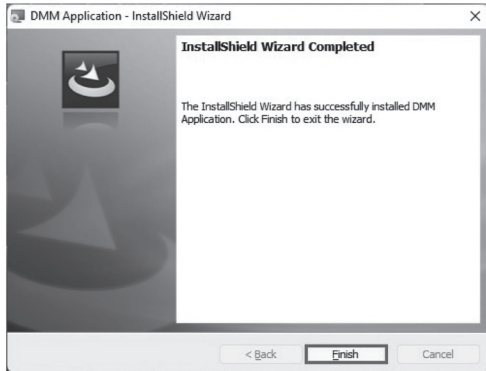


3. USB driver Installation


- (1) Please access our website (www.kew-ltd.co.jp/en/) and go to "Download", "Software" and then "DMM Application". Download "USB Device Driver" according to the instructions described on the page.
- (2) Connect MODEL 8241 and your PC with the supplied USB cable. Right-click Start button and then Device Manager.

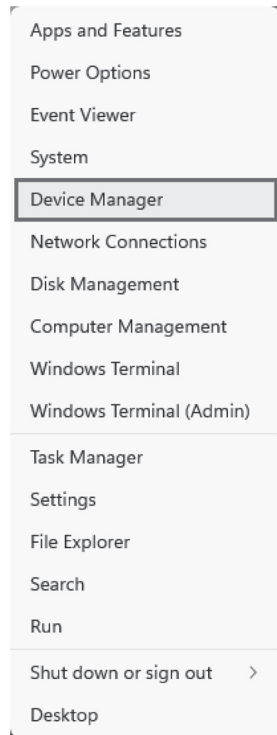


- (3) Click Other devices and right click on "MODEL8241". Then click Update Driver.

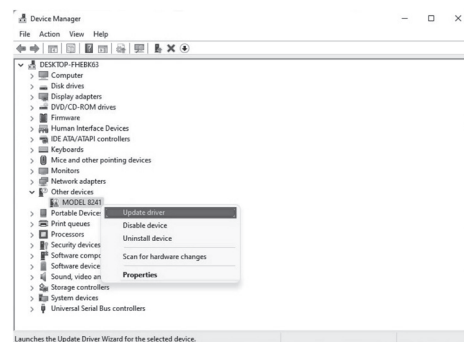


- (4) Select "Browse my computer for drivers".

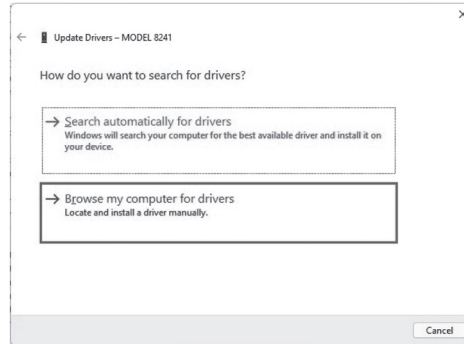


- (9) The following two icons will appear in Device Manager when the driver is successfully installed.

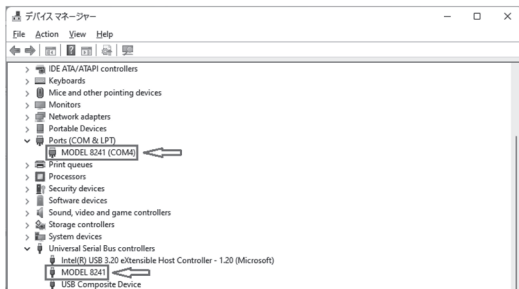

- (7) When the following confirmation message appears, click Install.

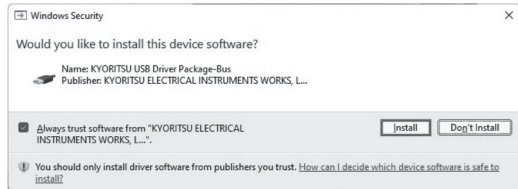


- (8) Installation is completed when the wizard says, "Windows has successfully updated your driver software". Click Close.

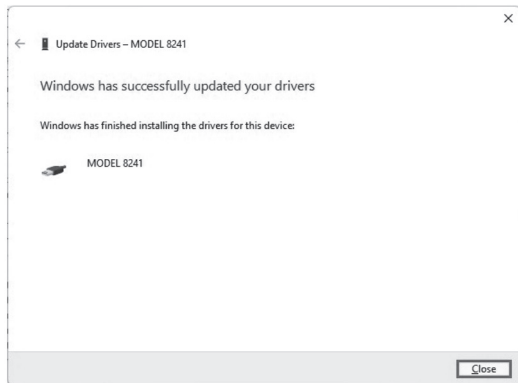

4. USB driver un-installation

If USB driver installation got aborted and unable to complete re-installation, follow the procedures below and remove the USB driver first. Then restart the whole installation process.

- (1) Connect your PC and MODEL8241 with a USB cable.
- (2) Right-click Start button, and then click Device Manager.
- (3) Click Other devices and right click on MODEL8241.
- (4) Click Uninstall to uninstall the USB driver.

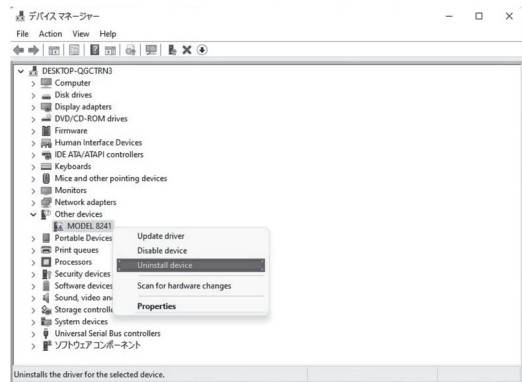

- (5) Disconnect the USB cable connected to the PC once, and connect it again.
- (6) When "Found New Hardware Wizard" window appears, please refer to and follow the procedures described in "3.USB driver installation" to complete installation.

MEMO



**KYORITSU ELECTRICAL
INSTRUMENTS
WORKS, LTD.**

2-5-20,Nakane, Meguro-ku,
Tokyo, 152-0031 Japan
Phone: +81-3-3723-0131
Fax: +81-3-3723-0152
Factory: Ehime,Japan

www.kew-ltd.co.jp